



Cross-Linked Closed Cell **Polyolefin Thermal Insulation Foam**






FlexiCell® Tubes

FlexiCell® XLPE is a closed cell chemically cross linked polyolefin foam, commonly used as thermal insulation to protect against heat loss and condensation.

FlexiCell® XLPE is reinforced with a heat bonded aluminium foil and is available with factory applied adhesive liner.



FlexiCell® Rolls

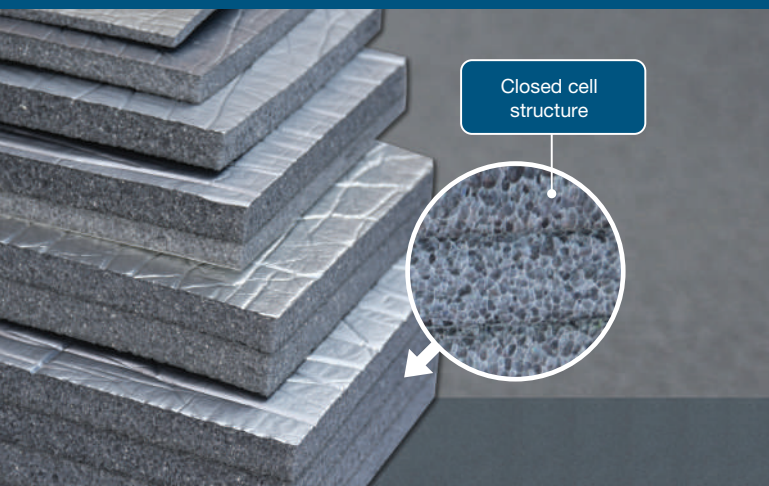


FlexiCell® Sheets



FlexiCell® XLPE prefabricated fittings are made in different sizes and shapes such as Elbows, T and Y sections.

Prefabricated fittings are available in a variety of wall thicknesses and inner diameters.

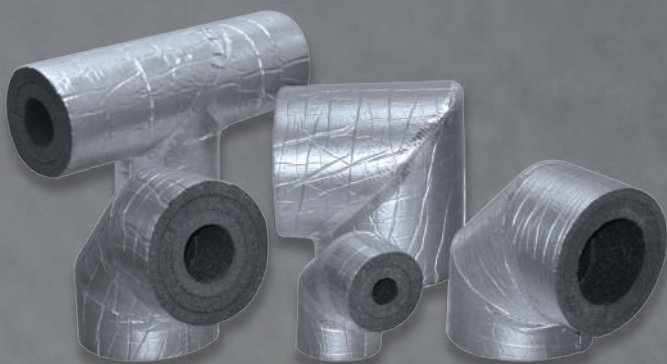

FlexiCell® Prefabricated Fittings

FIRE AND SMOKE PERFORMANCE

FlexiCell® XLPE meets AS1530.3 - early fire hazard properties of materials.



EXCELLENT THERMAL EFFICIENCY

FlexiCell® XLPE has a very low thermal conductivity, guaranteeing high performance in thermal insulation applications. Further to this, as FlexiCell® XLPE is closed cell, it also provides excellent levels of condensation control.



ENVIRONMENTALLY FRIENDLY

FlexiCell® XLPE is a CFC and HCFC free product. It does not contain, nor use in its production, any substances that contribute to Ozone Depletion Potential (ODP). FlexiCell® XLPE is fibre free and has a very low Volatile Organic Compound (VOC) emission level.



ZERO WATER VAPOUR PERMEABILITY

Condensation control is a key performance aspect of any insulation. FlexiCell® XLPE can be installed without any additional vapour barriers due to its closed cell construction, and watertight aluminium foil barrier. FlexiCell® XLPE's excellent protection against condensation ensures the long term thermal efficiency of the insulation.



QUICK & EASY TO INSTALL

FlexiCell® XLPE is fast and easy to install. It is more flexible than other pipe insulation products, including glasswool, polystyrene and other extruded foams. This results in greatly reduced installation time, thereby affording significantly increased productivity.



FLEXICELL® - XLPE

TECHNICAL DATA

Properties	Value/ Assessment	Tested to:																
Temperature Range Max. Line Temperature Min. Line Temperature <i>Our Customer Service Centre should be consulted for applications with temperatures below -80 °C</i>	+105 °C (+80 °C with PSA*) -80 °C (-30 °C with PSA*)	DIN EN 14706 ASTM C1427																
Thermal Conductivity	6 mm - 15 mm - 0.034 W/m·K 20 mm - 60 mm - 0.035 W/m·K <i>As per BCA/NZBC. Values are results tested per AS/NZS 4859.1 2018</i>	ASTM C518																
Density	25 ± 3 kg/m³ (foam core only)	-																
Color	Grey	-																
Water Vapour Permeance [perms]	0	ASTM E96																
Water Absorption	0.00008 g/cm²	JIS K6767																
Resistance to Corrosion	Excellent	ASTM B117																
Compression Set	35.77% (25 mm)	ASTM D3574																
Reaction to Fire	Ignitability 0 Spread of Flame 0 Heat Evolved 0 Smoke Developed 1	AS/NZ 1530.3																
	Class O	BS 476 Part 6 & 7																
Smoke Toxicity Levels	Passed	IMO MSC 307(88) Part 2 & 5																
Resistance to Fungi	Excellent	ASTM G21																
Resistance to Bacteria	Excellent	ISO 22196																
Corrosion Risk	No corrosion risk for steel, stainless steel and copper pipes	-																
Chemical Analysis	Chloride content - 0.0018 w/w% pH - 8.22	DIN EN 13468																
Emission VOC (level)	<4 µg/m²/hr	ASTM D5116																
Environmental Friendly Ozone Resistance Ozone Depletion Potential (ODP) Global Warming Potential (GWP) CFC & HCFC, Dust, Fibres	Excellent 0 <5 Free	Size Availability <table border="0"> <tr> <td>Tubes thickness</td> <td>Tubes ID</td> </tr> <tr> <td>10, 12, 15 mm</td> <td>6-125 mm</td> </tr> <tr> <td>20, 25, 30, 32, 35, 40 mm</td> <td>6-711 mm</td> </tr> <tr> <td>50, 55, 60, 65 mm</td> <td>12-711 mm</td> </tr> <tr> <td>Sheets thickness</td> <td>Sheets size</td> </tr> <tr> <td>25, 30, 35, 40, 50 mm</td> <td>1.2 m x 2.4 m</td> </tr> <tr> <td>Rolls thickness</td> <td>Rolls size</td> </tr> <tr> <td>3, 5, 10, 12, 15, 20, 25 mm</td> <td>1 & 1.2 m x 20 m (various lengths available depending on thickness)</td> </tr> </table> Pressure sensitive adhesive coating options available.	Tubes thickness	Tubes ID	10, 12, 15 mm	6-125 mm	20, 25, 30, 32, 35, 40 mm	6-711 mm	50, 55, 60, 65 mm	12-711 mm	Sheets thickness	Sheets size	25, 30, 35, 40, 50 mm	1.2 m x 2.4 m	Rolls thickness	Rolls size	3, 5, 10, 12, 15, 20, 25 mm	1 & 1.2 m x 20 m (various lengths available depending on thickness)
Tubes thickness	Tubes ID																	
10, 12, 15 mm	6-125 mm																	
20, 25, 30, 32, 35, 40 mm	6-711 mm																	
50, 55, 60, 65 mm	12-711 mm																	
Sheets thickness	Sheets size																	
25, 30, 35, 40, 50 mm	1.2 m x 2.4 m																	
Rolls thickness	Rolls size																	
3, 5, 10, 12, 15, 20, 25 mm	1 & 1.2 m x 20 m (various lengths available depending on thickness)																	
Storage life: Can be stored for 24 months (12 months with PSA*) from manufacturing date in a dry, clean, dust free room at normal humidity and ambient temperature. <i>Note: All outdoor applications of FlexiCell® XLPE need to be protected by FlexiCell® approved coating or weather resistant cladding.</i> *PSA - Pressure Sensitive Adhesive																		

This information, presented by Hira Industries, is accurate to the best of our knowledge at the time of publication. All product data is based on average values and should be used as a general guide only. Due to the unique nature of specific applications, results may vary according to individual circumstances beyond the manufacturers control. As our products are subject to constant research and development, Hira Industries reserves the right to amend, modify and/or update the content of this publication at any time, without prior notice. Visit flexicell.com.au for more information, technical specifications, installation guidelines and product warranty terms and conditions.

Manufactured by Hira Industries

P.O. Box 50673, Dubai - UAE
 T: +971 4 884 8414
 E: enquiry@rhira.com
www.rhira.com

Australian Branch Address

18 Baddeley Circuit, Croydon
 Vic.3136, Australia.
 T: +61 419 701 375
www.flexicell.com.au

